



Features

- 15 mA DALI line current
- Multiple finishes available
- Up to 10 units per DALI line
- Accessories for 1 - 4 buttons per plate
- Models to suit 64 and 80 mm mounting centres
- Customisable labels available for specific applications
- Selectable button additions on DALI application controller



Powered by DALI

No additional supply means energy savings and simple installation



DALI-2

For use with DALI-2 compliant application controller



Integrated illumination

Configurable inbuilt LED status indicator for user convenience



Configurable

Various button layouts to suit application



Product range


| Order code | Description |
|-------------------------|---|
| zc-sceneset-a4 | Standard sceneset to suit 60 mm wall mount |
| zc-sceneset-c-a4 | C-clip compatible sceneset to suit 84 mm wall mount |

Features


- 15 mA DALI line current
- Multiple finishes available
- Up to 10 units per DALI line
- Multiple control devices per line
- Accessories for 1 - 4 buttons per plate
- Designed for compliance to IEC 62386-301*
- Customisable labels available for specific projects
- For use with DALI-2 compliant application controller
- Control scenes / groups / actions / events with a zencontrol control system

* Pending publication of test sequences

Dimensions

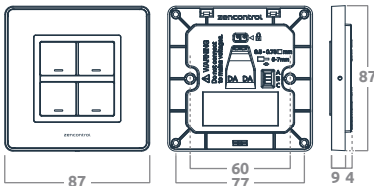


zc-sceneset-a4
Dimensions 87 / 87 / 13 mm
Mounting centres 64 mm

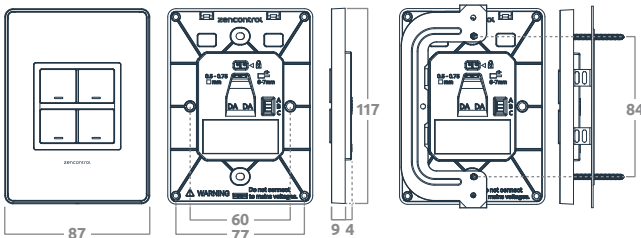

zc-sceneset-c-a4
Dimensions 87 / 117 / 13 mm
Mounting centres 80 mm

With c-clip

Common configurations

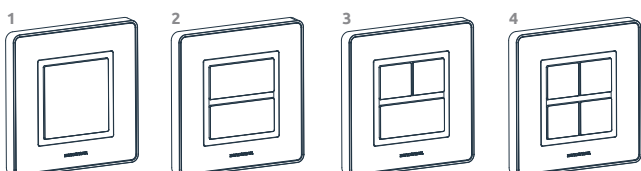

Specifications

| | |
|------------------------------|--|
| Supply | DALI |
| Control system | DALI-2 |
| DALI line current | 15 mA |
| Wiring | 0.5 - 0.75 mm ² Strip 6 - 7 mm |
| Operating temperature | 0 to 45°C |
| Material | PC UV stabilised, ABS, 316 stainless |
| Ingress protection | IP20 |
| Compliance standards | IEC 61347-2-11 CISPR 15 IEC 62386-301 EMC-2004/108/EC LVD-2006/95/EC |

Notice

- The switch must not be connected to any mains. It is powered directly from the DALI line.
- The DALI line is not SELV. It must be treated like LV mains and treated with the same precautions and wiring regulations.
- Compatible with zencontrol control system with a firmware version of 00.08.10 or above

Kit content

| | |
|----------------------------|-----------------------------|
| zc-sceneset-a4 | |
| zc-scnsset-btn-2 | 2 x blank half button |
| zc-scnsset-btn-4 | 2 x blank quarter button |
| zc-scnsset-frm-mult | 2 - 4 button frame |
| zc-scnsset-fp-st | Brushed stainless faceplate |
| **Not included | C-clip |

Accessory range

| | |
|------------------------------|---|
| Order code | Description |
| zc-scnsset-btn-1 | Blank single button (note requires zc-sceneset-frm-s/-c) |
| zc-scnsset-btn-2 | Blank half button |
| zc-scnsset-btn-4 | Blank quarter button |
| zc-scnsset-frm-s | Single button frame to suit square base |
| zc-scnsset-frm-mult | 2 - 4 button frame to suit square base |
| zc-scnsset-frm-c | Single button frame to suit c-clip base |
| zc-scnsset-frm-mult-c | 2 - 4 button frame to suit c-clip base |
| zc-scnsset-fp-st | Brushed stainless faceplate for standard model |
| zc-scnsset-fp-st-c | Brushed stainless faceplate for c-clip model |