


# UniOP eTOP504

The eTOP504 compact 4,3" widescreen display completes the eTOP series 500 with a no-compromise low-cost product. The built-in dual 100Mb Ethernet interfaces with switch function enhance its communication capability and make it the ideal choice for small systems.

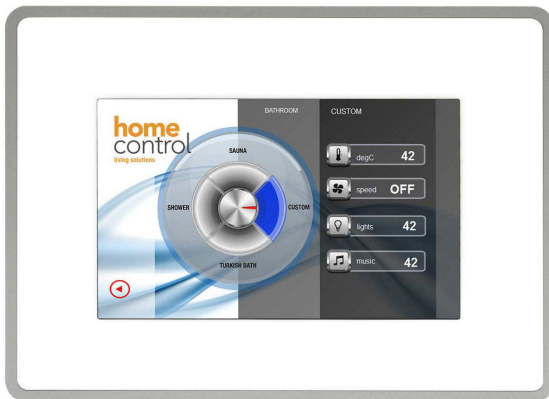

- 4.3" TFT color display
- 480x272 pixel resolution, 64K colors
- Resistive touchscreen
- 2 Ethernet ports with switch function
- USB Host port
- SD Card slot
- Multistandard Serial Port
- Connection to bus systems using optional plug-in modules

## Highlights

The eTOP Series 500 HMI panels have been designed to run the JMobile software.


- JMobile runtime included. Full compatibility with JMobile Studio.
- Full vector graphic support. Native support of SVG graphic objects. Transparency and alpha blending.
- Full object dynamics: control visibility and transparency, move, resize, rotate any object on screen. Change properties of basic and complex objects.
- TrueType fonts
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements. Far East languages are supported. Tools available in JMobile Studio support easy third-party translations and help reducing development and maintenance costs of the application
- Data display in numerical, text, bargraph, analog gauges and graphic image formats.
- Rich set of state-of-the-art HMI features: data acquisition, alarm handling, scheduler and timed actions (daily and weekly schedulers, exception dates), recipes, users and passwords, e-mail and RSS feeds, rotating menus
- Includes support for a wide range of communication drivers for Factory and Building Automation systems.
- Multiple drivers communication capability.
- Remote monitoring and control. Client-Server functionality. Mobile clients supported.
- Remote maintenance and support with VNC-based functionality.
- Off-line and On-line simulation with JMobile Studio.
- Powerful scripting language for automating HMI applications. Script debugging improves efficiency in application development.
- Rich gallery of symbols and objects
- Project templates
- Optional plug-in modules for fieldbus systems, I/O and controllers.
- Wide dimming to 0% supported

## Technical Data

<b>Display</b>	
Type	TFT
Resolution	480x272 pixel
Active display area	4.3" diagonal (95.4x53.9 mm)
Colors	64K
Backlight	LED
Brightness	150 cd/m <sup>2</sup> typ.
Dimming	Yes
<b>System Resources</b>	
Operating System	Microsoft Windows CE 6.0
User memory	128 MB Flash
RAM	256MB DDR
<b>Operator Interface</b>	
Touchscreen	Analog resistive
LED indicators	1 (dual color)
<b>Interface</b>	
Ethernet	2 10/100 Mbit with integrated Switch
USB	1 Host interfaces v.2.0
Serial	RS-232, RS-485, RS-422, software configurable
Expansion Slot	1 Optional Plugin
Memory Card	SD Card Slot
<b>Functionality</b>	
Vector graphics	Yes, includes SVG support
Object dynamics	Yes. Visibility, opacity, position, size, rotation for most object types.
TrueType fonts	Yes
Multiple driver communication	Yes
Data acquisition and trend presentation	Yes. Flash memory storage limited only by available memory
Multilanguage	Yes, with runtime language switching.
Recipes	Yes. Flash memory storage limited only by available memory
Alarms	Yes
Historical event list	Yes
Users and passwords	Yes
Hardware Real Time Clock	Yes, with battery back-up


Screen saver	Yes
Buzzer	Yes, audible feedback for touchscreen
<b>Ratings</b>	
Power supply voltage	24 Vdc (10 to 32 Vdc)
Current consumption	0.55A at 24Vdc(max.)
Fuse	Automatic
Weight	Approx 1.0 Kg
Battery	Rechargeable Lithium battery, not user-replaceable
<b>Environmental Conditions</b>	
Operating temperature	0 to 50 °C (vertical installation)
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 – 85 % relative humidity, non-condensing
Protection class	IP66 (front) IP20 (rear)
<b>Dimensions</b>	
Faceplate LxH	147x107 mm (5.78x4.21")
Cutout AxB	136x96 mm (5.35x3.78")
Depth D+T	56 + 4mm (2.40+0.16")
<b>Approvals</b>	
CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
DNV	DNV Type Approval Certificate
UL	UL508 Listed Haz. Loc. Class I, Division 2, Groups A,B,C and D.
C-Tick	C-Tick mark

**Dimensions**

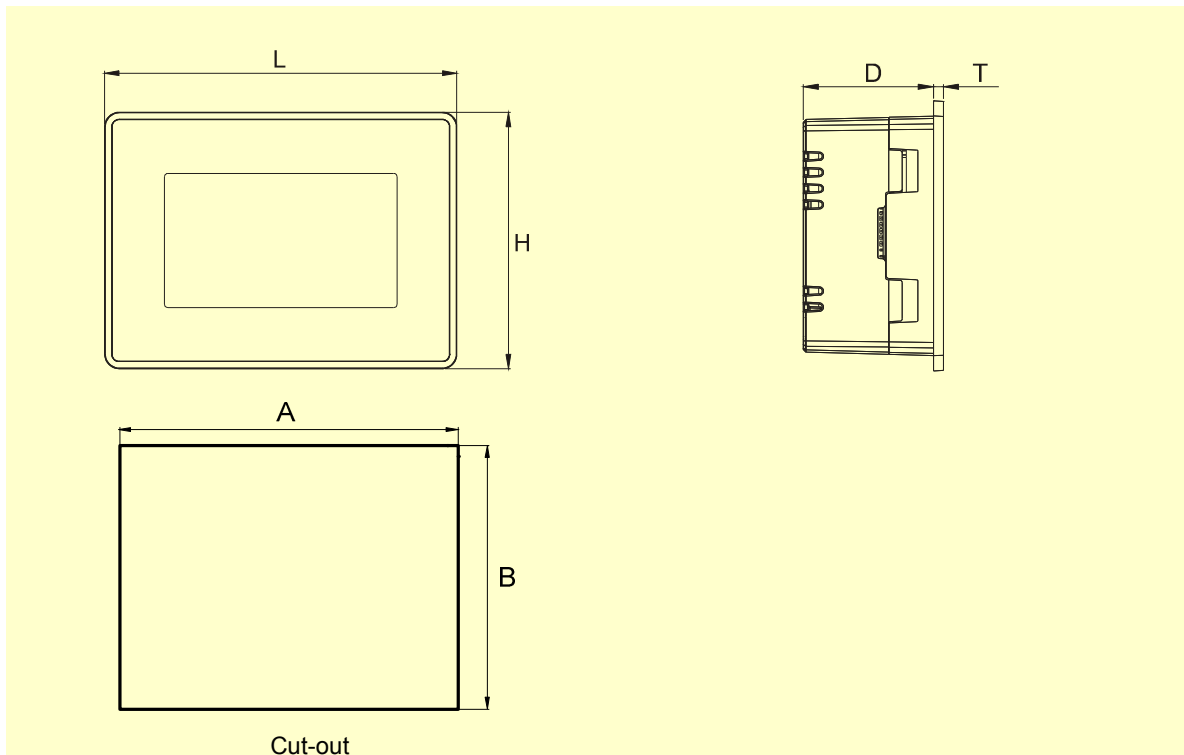

Cut-out

**Connections**

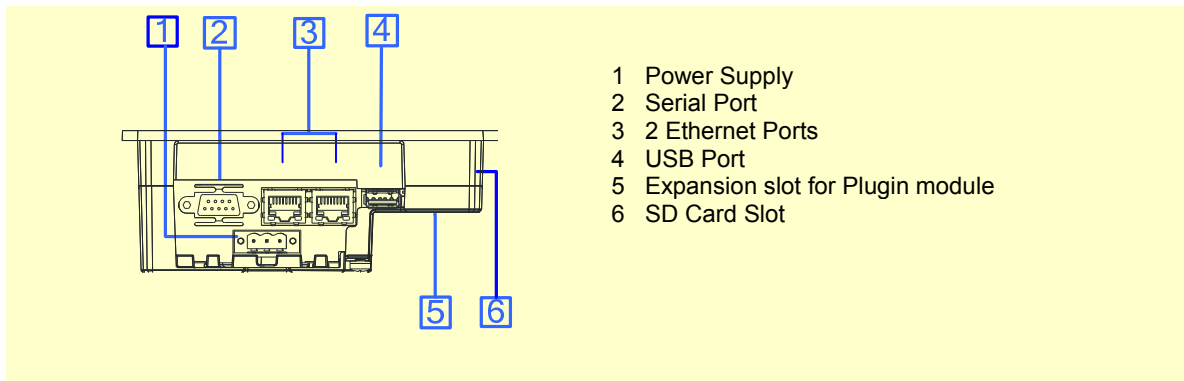

**Ordering Information**

<b>Model-Type</b>	<b>Part Number</b>	<b>Description</b>
eTOP504-White	ETOP504U1P1	4.3" TFT color touchscreen panel with Ethernet interface, White front panel. JMobile run-time.
eTOP504-Silver	ETOP504U2P1	4.3" TFT color touchscreen panel with Ethernet interface. Silver front panel. JMobile run-time.
eTOP504-Black	ETOP504U3P1	4.3" TFT color touchscreen panel with Ethernet interface Black front panel. JMobile run-time.
PROTFOIL-04-GL	R-PROT11	Disposable protection foil for 3.5"/3.8"/4.3" eTOP touch panels (10 pieces)
PROTFOIL-04-UV	R-PROT17	Disposable protection foil for 3.5"/3.8"/4.3" eTOP touch panels (10 pieces). UV resistant

---

**ptn0314**

**Ver. 1.5**

**Copyright © 2011-2014 Exor International S.p.A. – Verona, Italy**

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

[www.uniop.com](http://www.uniop.com)

ptn0314-5.doc - 17.02.2014

UniOP eTOP504