

R5060WB

R5060WB
Wallbox to suit Reflection™
range of wall switches

Important note: This wall box must be
used to install Reflection™ Wall switches

**Installation instruction**

This instruction focuses on the fitting of the R5060 C-Bus Reflection Series Key Input Unit and the adjustments needed to the Wall Box to suit different building types.

The Wall Box may be fitted into suitably prepared masonry or attached to noggins or studs in timber frame buildings. How to fix the Wall Box to the wall is outside the scope of this instruction; standard building practices should be observed.

STEP 1

Fix Wall Box to wall (either masonry or timber frame), as shown in Figure 1.

The Mounting Plate is adjustable from 'flush with the Wall Box' to '13mm from the Wall Box'. Always ensure that the Wall Box is within 13mm of finished wall surface.

This completes the installation of the Wall Box.

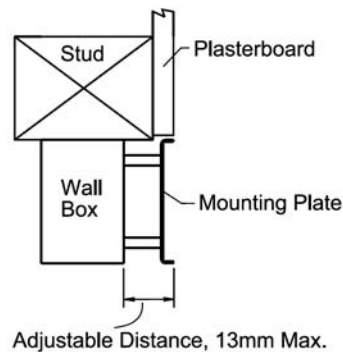


Figure 1.
Adjustment Distance as Viewed
from Above